






BREDD	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-
Lådan på insidan	257	357	457	557	Kombinationer av flera lådor										
Extern enhet	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415			

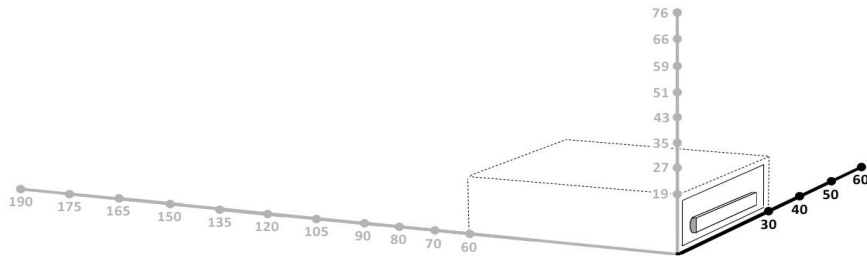

HÖJD	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Lådan på insidan	117	196	275	354	432	511	590	669	Kombinationer av flera lådor						
Lådskena höjd	86	86	188	188	330	330	330	330							
Höjd på skiljeväggen	76	76	178	178	320	320	320	320							
Extern enhet	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

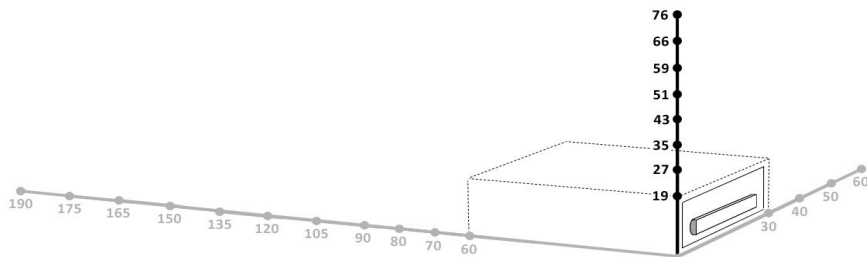


DJUPGÅENDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Lådan på insidan	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Procentuell andel av öppningen av brickan	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standardpartition	-	-	-	-	En skiljevägg monteras under tillverkningen.										
Max. lastkapacitet per låda	60 KG					100 KG									
Extern enhet	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

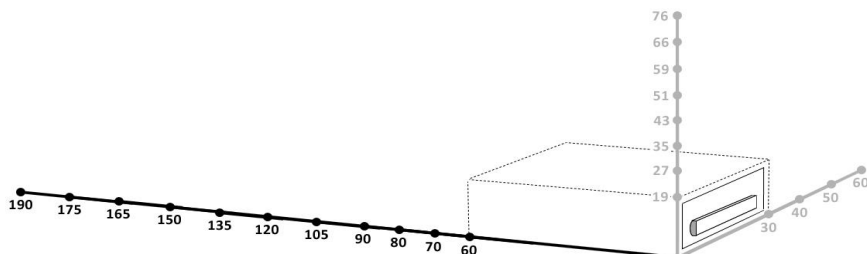




BREDD	30	40	50	60	-	-	-	-	-	-	-	-	-	-
Öppet fack på insidan	275	374	473	572										
Extern enhet	315	415	515	615										

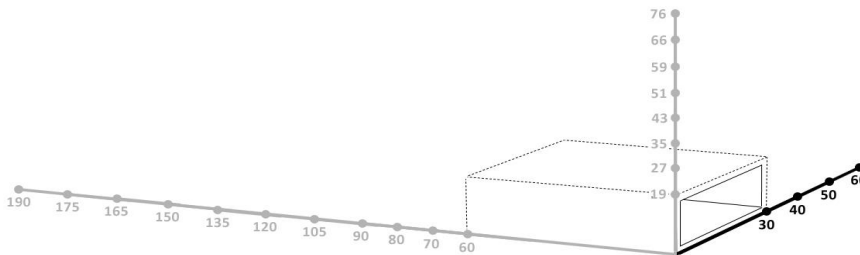

HÖJD	19	27	35	43	51	59	66	76	-	-	-	-	-	-
Öppet fack på insidan	161	240	318	397	476	555	633	731						
Extern enhet	191	270	348	427	506	585	663	761						

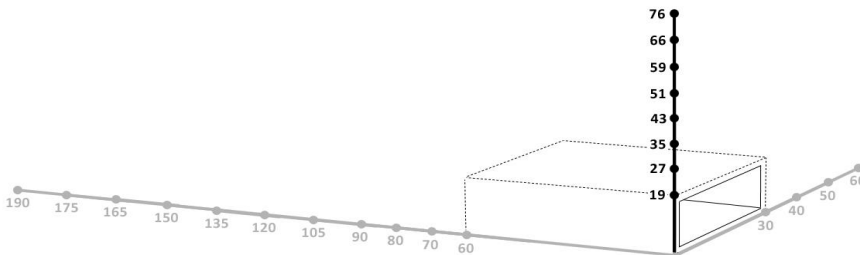

DJUPGÅENDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Öppet fack på insidan	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855				
Extern enhet	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871				

